


PIN Assignment

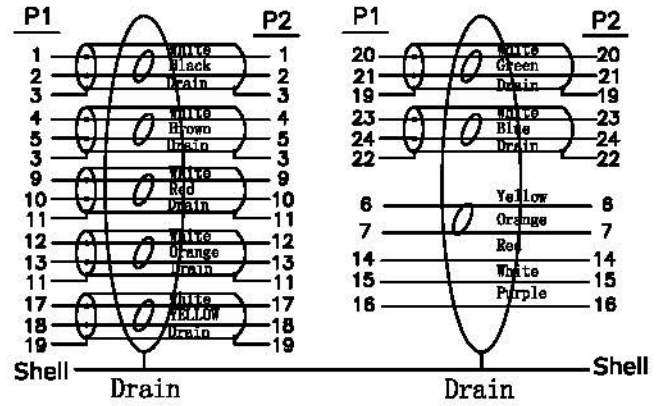

ELECTRICAL TEST:

1. 100% OPEN SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 2 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

13	Wire Clip OD:7.3mm	2	pcs
12	Ferrite core 28.5*17.5*11.5MM	2	pcs
11	DVI M TRANSPARENT DUST COVER	2	pcs
10	DVI 24# Yellow down Shell aluminum alloy laser etching DVI LOGO	2	pcs
9	DVI 24# Yellow up Shell aluminum alloy laser etching DVI LOGO	2	pcs
8	#4-40UNC 4*38.5 Gold-plated screws	4	pcs
7	TUBE BLACK : φ 1.5*22mm THICK	0.044	m
6	TUBE BLACK : φ 1.0*12mm THIN	0.168	m
5	BLACK Ø2.0*10mm THIN	0.14	m
4	45P BLACK PVC	40	g
3	TRANSPARENT PE	6	g
2	DVI(24+1) M SOLDER TYPE, GOLD PLATED SHELL, BLACK INSULATION	2	pcs
1	UL20276 (30AWG*1PR+EAM)*7C+30AWG*1PR+30AWG*3C+AEB 85%AL OD:7.3MM WITH BLACK/YELLOW NET	1	M
NO	DESCRIPTION	QTY	UNIT

	TOLERANCE	
	INCHES	M/M
	.X	.015 .30
	.XX	.010 .10
	.XXX	.005 .05
DRAWN BY		
CHECK BY		
APPD BY		

rotronic

11.04.5511

ROLINE GOLD DVI Cable, Dual Link, M / M
1m, black w/yellow & black nylon net

SCALE	NONE	DRAWING NO:	REV A
UNIT	MM		
DATE	2013.07.26		1/1