

Conn.2 HDMI A Type Male Molding

Conn.1 HDMI A Type Male Molding


Electrical Test:

1. 100%Test(Open, short ,miss wire)
2. Contact Resistance: 10 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot:300V DC/10ms

Table:

Item #	Length	Resistance
11.04.5680	1000±30mm	2 ohm
11.04.5681	2000±30mm	2 ohm
11.04.5682	3000±50mm	2 ohm
11.04.5683	5000±50mm	2 ohm

Pin Assignment

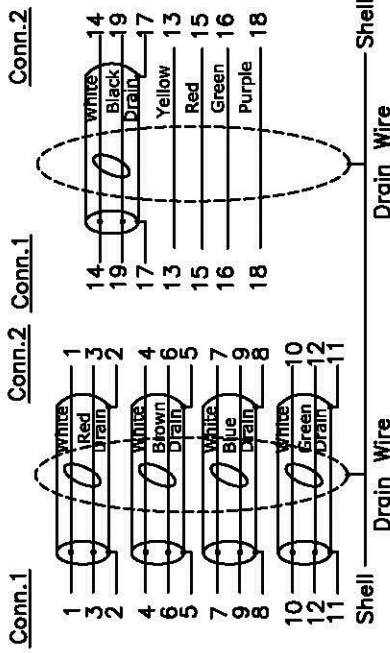

NO.	DESCRIPTION	Q'TY	UNIT
⑤	HDMI Transparent Dust Cover	2	pcs
④	Shell: Gun metallic	2	set
③	Inside Molding: PE	8	g
②	HDMI 19P Male, Shell Gold Plated 3u", Insulation: Black	2	pcs
①	UL20276 [26AWG(1/0.41BC)*1PR+EAM]*5P+26AWG(1/0.41BC)*4C+AEB(85%TCOS) +Jacket Color: Transparent Black PVC OD:9.5±0.2mm	L	M

REV.	DATE	CONTENTS OF CHANGE	DESIGNER	TOL±	APPROVAL											SCALE	UNIT	MM	DATE	ITEM NO.
					RANGE	Fid	Met	Inel	Por	Cab	Pac	Gas	DIS	CHECK	DRAWING					
△				0-8	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2						2013-10-23	11.04.5680 / 11.04.5681 / 11.04.5682 / 11.04.5683	
△				6~30	0.1	0.1	.15	.25	1	1	0.5	.25								
△				30~60	0.1	.15	0.2	0.3	2	1.5	1	0.3								
△				60~160	.15	.15	.25	0.3	2	2	1	.45								
△				160~315	.15	0.2	0.3	0.4	2.5	2	1	0.6								
△				315~600	0.2	0.3	0.4	0.5	3	3	2	1.1								

rotronic

ROLINE Ultra HD HDMI Cable, with Ethernet
A M / A M, black color