


NOTE:

1. Electrical test:
 - A: MINI DP connector text:
 - (1). Insulation resistance: DC 300V 10M ohm;
 - (2). Contactor resistance: 3 ohm;
 - (3). Dielectric strength: 150V AC/Sec, 1mA.
 - B: Finished testing text condition:
 - (1) 100% open short & miss wire test
 - (2) Displayport practical application Test Pass: 4k*2k @30hz
2. PACKING: 1PCS/ 20101A INLINE BAG+LABEL1, 10PCS/PE BAG+LABEL2
3. ROHS2.0 AND REACH COMPLIANT
4. PRINT WORD: InLine DisplayPort Cable E119932-T 兄 AWM
STYLE 20276 80°C 30V VW-1

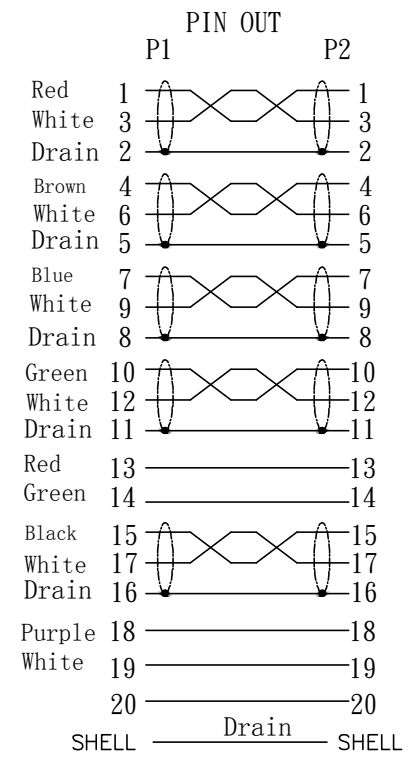

⑨	DUST CAP	DISPLAYPOR MALE LDPE	1	
⑧	OUTER COVER	DISPLAYPORT 20PIN LATCHING MALE CONNECTOR Black ABS Assembly TYPE OUTER COVER	1	
⑦	THUMB SCREW	NUT-NICKEL PLATED#4-40*15mm	2	
⑥	THUMB SCREW	NUT-NICKEL PLATED#4-40	2	
⑤	MOLDED	45P BLACK PVC	2	
④	MOLDED	LDPE	2	
③	CONNECTOR	DP 20P/F SOLDER TYPE, BLACK INSULATION , THE PIN GOLD PLATED , THE SHELL FOR NICKEL PLATED, PCB board+Black jacket	1	
②	CONNECTOR	DP 20P/M SOLDER TYPE, BLACK INSULATION , THE PIN GOLD PLATED , THE SHELL FOR NICKEL PLATED	1	
①	CABEL	(28AWG*1P+D+AL+MY)*5+28AWG*5C+ADB BLACK PVC JACKET, OD:φ7.3±0.2MM	1	

UNO ELECTRONIC LIMITED (HK)

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	REMARK	CUSTOMER	INTOS ELECTRONIC AG	ITEM NO.	171001		
	FERGUS	Update 4k*2k@60Hz to 4k*2k@30Hz, shell plated nickel	2016.09.02	A1	PRODUCT NAME	DP 20P M-DP 20P F	UNO ITEM NO.	766000	UNIT	MM
	ARVIN	NEW	2016.08.19	A	DRAWNBY	CHECKBY	APPOBY	DATE		
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	ARVIN	ALVAN	2016.08.19			