

# rotronic

**Datenblatt - Fiche technique - Data sheet**


**S3602 ~ S3605**



**SVGA Kabel HD15 ST – ST**

**Câble SVGA HD15 M/HD15 M**

**SVGA Cable, HD15 M – HD15 M**

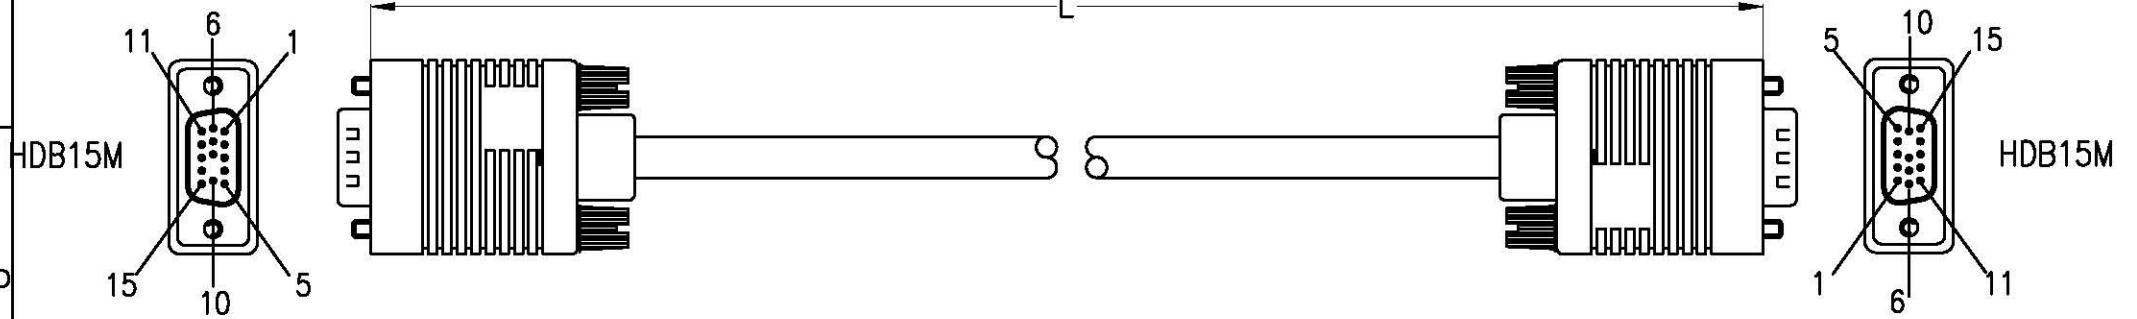

**NOTE:**

**1.MATERIALS**

1.1 CABLE:[(7/0.12TC+FPE1.5+7/0.12BC+AM)\*3+(7/0.10BC+PVC1.1)  
 \*4+AL+7/0.12BC+80/0.12ALM+ BLACK PVC JACKET.  
 OD:6.0±0.2MM .

CABLE PRINTING:" VW-1 80°C 30V LOW VOLTAGE COMPUTER CABLE"

1.2 HDB15 TYPE MALE:SOLDER TYPE,BLUE PBT INSULATION,EMPTY 9,GOLD PLATED CONTACTS,NICKEL PLATED SHELL.

1.3 ALL HOODED:BLACK PVC

1.4 SCREW:NICKEL PLATED,4\*46MM,HOODED BLACK PVC.

**2.TESTING:100% SHORT AND OPEN TEST.**


CONDUCT RISITANCE:5Ω INSULATION RISITANCE:10 MΩ

H-V:300V/0.01S

**3.PACKING:1PC/PE BAG.**

**4.ALL MATERIALS SHOULD BE ROHS ENVIROMANTAL COMPLIANT.**

**PIN OUT**

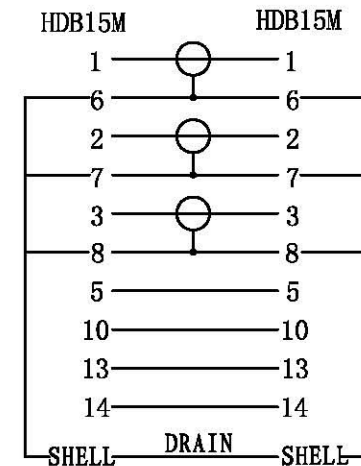

P/N CHART	
MODEL	LENGTH
S3602	2000±50MM
S3603	3000±70MM
S3604	6000±150MM
S3605	10000±150MM

		DIMENSIONAL TOLERANCES:		SIZE: FREE	CUSTOMER:		<b>rotronic</b>		ENG.: STEPHEN LEE		
		X. ± .X ± .XX ±		UNIT: mm					CHECKED:		
01	CHANGE CONTACT OUTPUT	2011-12-6							DRAWING NO.: 0311		PRODUCT DESCRIPTION: VGA3+4 HDB15M/HDB15M
00	NEW ISSUE	2011-10-24							APPROVED:		
REV.	MODIFY DESCRIPTION	DATE	X ±3° X ±1°	REV.: 01			PAGE: 1/1				