


Specification	Frequencyrange (MHz)	Strength (dB)
Insertion loss (IN-RADIO)	0.15-26	-
	88-108	2.0
	111-120	4.0
	120-139	-
Insertion loss (IN-TV)	5-30	2.5
	47-68	-
	120-139	4.0
	139-150	2.5
	150-862	2.0
Return loss (IN-SAT)	950-1750	-
	1750-2150	2.5
	2150-2400	-
	IN/OUT/TV/RADIO/SAT	8.0

- female con. for SAT, IEC connector male for TV and FEMALE for RADIO  
 - RFI shielded zinc die-casting housing  
 - Screening efficiency acc. EN 50083-2 Class A  
 - Power passing 24V DC, 0.5A, IN <-> SAT

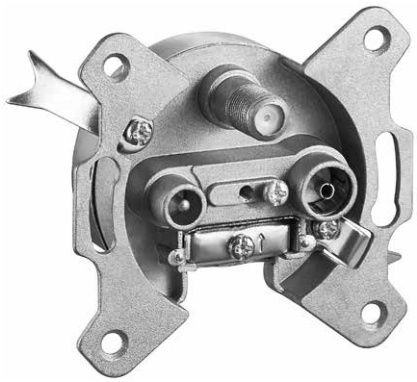

- 3-Loch Antennen-Dose (SAT/TV/Radio)
- Stich- oder Enddose
- Universal-Antennendose für BK-, SAT und Rundfunkanlagen
- Sonderkanal und Rückkanal tauglich
- mit DC-Durchgang
- 75 Ohm
- RoHS-konform

- 3 hole Antenna Wall Socket (SAT/TV/Radio)
- stub or terminal socket
- Universal Antenna wall socket for BK, SAT and Radio systems
- suitable for Digital channel and back channel.
- with DC pass through
- 75 Ohm
- RoHS-compliant

**Änderungen**

Datum	Name	gez.:	Datum	Name
		gez.:	28.01.2014	tf
		gepr.:	28.01.2014	tf
		Norm:		
Änderungen vorbehalten / Subject to change				

Bezeichnung	Blatt
SAT AD 03-01 DC	
Zeichnungs-Nr.:	von
67046/68852	

