

Subwoofer cable

Y-inch cable for active subwoofer with stereo input

Displacement is irreplaceable - except by even more displacement. Following this wisdom originating from engine design, nothing stands in the way of powerful basses using the Y-cable. Due to a 50 Ω defined wave impedance, multiple signal shielding, pure materials, and precise workmanship subwoofers sound free of distortion and full of power.

- 50 Ω defined wave impedance
- pure copper conductor and 2-way shielding for clear signal quality
- 24-Karat gold plated contacts for minimum transfer resistances

Specifications

Connections

Plug material:	triple-coated PVC / ABS
Contact material:	24-Karat gold plated
Shielding:	yes
Port 1, type:	RCA plug (RCA)
Connector 1, connector length (mm):	39.8
Connector 1, connector width (mm):	14.0
Connector 1, connector height (mm):	14.0
Port 2, type:	2 x RCA plug (RCA)
Connector 2, connector length (mm):	39.8
Connector 2, connector width (mm):	14.0
Connector 2, connector height (mm):	14.0

cable


Type:	double core round cable
Length (m):	1 2 3 5 7.5 10 15 20
Inner conductor material:	OFC (Oxygen free copper)
Inner conductor diameter (mm):	25 x 0.120
AWG:	23
Number of shieldings:	2 x
Type of 1st shielding	Aluminium foil
Type of 2nd shielding	Copper braid 96 wires x 0.12 mm cross section
Outer sheath material:	highly elastic PVC
Outer sheath diameter (mm):	6.0
Kink protection:	on both sides

Signal transmission


Transmission modes:	analog audio signals
max. Bandwidth (MHz):	10.0
Capacitance (pF):	155
Characteristic impedance (Ω):	50

General


Operating temperature from / to (°C):	-10 / +80
Warranty (years):	10

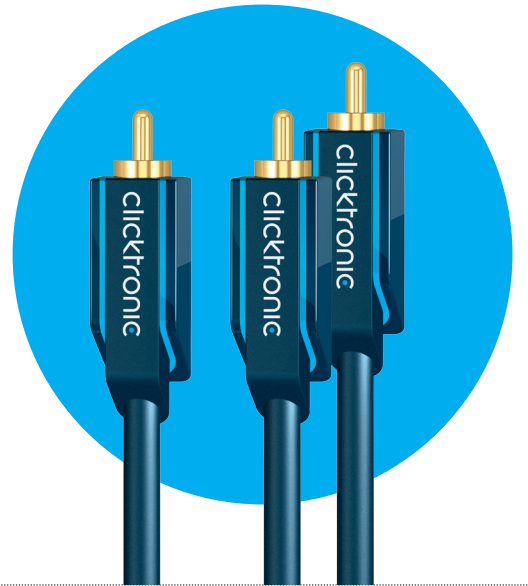

Cross section





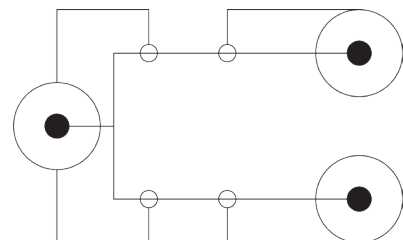





Wiring diagram



10 Years Warranty **OFC** **24 Carat Gold** **2x**
 Designed in Germany High-Quality Assurance 99,99% Oxygen Free Copper Anti Resistance Connections Cable Shielding

Subwoofer cable

Y- Cinch cable for active subwoofer with stereo input

Article no.	Cable lengths (m)	Packaging dimensions (mm)	Weight (kg)	Figure	EAN Code
70454	1.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 704543
70456	2.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 704567
70457	3.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 704574
70458	5.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 704581
70459	7.50	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 704598
70460	10.0	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 704604
70462	15.00	Single carton: 185 x 180 x 70 Master carton (16 pcs.): 400 x 315 x 435	Single carton: XX Master carton: XX		4 040849 704628
70463	20.00	Single carton: 185 x 180 x 70 Master carton (16 pcs.): 400 x 315 x 435	Single carton: XX Master carton: XX		4 040849 704635

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation. Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig/Germany