

Opto-cable set

optical digital cable for audio data including 3.5 mm adapter

The optical digital audio connection with optimal luminous efficiency and data transmission rate. The highly precise ion full metal plug engages simply, sits firmly and reliably. The result is crystal-clear three-dimensional sound and an audio experience like that, as it should be. Owing to the enclosed 3.5 mm adaptor particularly and practically applicable with many mobile devices, Notebooks and game consoles.

- pure fiber-optic cable with optimal light output
- precisely fitting high precision full metal connector
- 3.5 mm adapter included in the scope of delivery

Specifications

Connections

Plug material:	High precision full metal
Port 1, type:	TOSLINK connector / 3.5 mm connector
Connector 1, connector length (mm):	39.8
Connector 1, connector width (mm):	14.0
Connector 1, connector height (mm):	14.0
Port 2, type:	TOSLINK connector
Connector 2, connector length (mm):	39.8
Connector 2, connector width (mm):	14.0
Connector 2, connector height (mm):	14.0

cable

Type:	Round cable
Length (m):	0.5 1 2 3 5 7.5 10 15 20
Inner conductor material:	POF (Polymer Optical Fiber)
Inner conductor diameter (mm):	1 x 1.0
Outer sheath material:	highly elastic PVC
Outer sheath diameter (mm):	6.0
Kink protection:	on both sides

Signal transmission

Transmission modes:	digital audio signals
supported audio standards:	Dolby Digital/Plus, Dolby TrueHD, DTS-HD Master Audio™, DVD-Audio, SA-CD

General

Operating temperature from / to (°C):	-10 / +80
Warranty (years):	10




TOSLINK connector / 3.5 mm connector



TOSLINK connector



Cross section

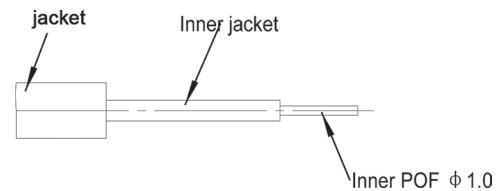










Wiring diagram



Opto-cable set

optical digital cable for audio data including 3.5 mm adapter

Article no.	Cable lengths (m)	Packaging dimensions (mm)	Weight (kg)	Figure	EAN Code
70565	0.50	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 705656
70566	1.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 705663
70568	2.00	Single carton: 185 x 80 x 25 Master carton (40 pcs.): 400 x 295 x 235	Single carton: XX Master carton: XX		4 040849 705687
70569	3.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 705694
70570	5.00	Single carton: 185 x 180 x 40 Master carton (24 pcs.): 400 x 285 x 435	Single carton: XX Master carton: XX		4 040849 705700
70571	7.50	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 705717
70572	10.00	Single carton: 185 x 180 x 55 Master carton (20 pcs.): 400 x 310 x 435	Single carton: XX Master carton: XX		4 040849 705724
70574	15.00	Single carton: 185 x 180 x 70 Master carton (16 pcs.): 400 x 315 x 435	Single carton: XX Master carton: XX		4 040849 705748
70575	20.00	Single carton: 185 x 180 x 70 Master carton (16 pcs.): 400 x 315 x 435	Single carton: XX Master carton: XX		4 040849 705755

TARIC Code: 85444290900

At Clicktronic® cables are designated as standard HDMI™ cables above a length of 7.5 meters, according to the test criteria, even if they originally are designed as High Speed HDMI™ cables and mostly show a significant power increase over long distances.

All company and product names are trademarks of their respective owners. All rights reserved. HDMI™ is a registered trademark of HDMI Licensing L.L.C.

The content may differ from those shown. We reserve the right for printing errors and changes to product packaging or documentation. Clicktronic®, Pillmannstraße 12, D-38112 Braunschweig/Germany